COMPLETED PROJECT DETAILS 2023-2024

PROJECT NAME: Marsa Chaps Sports Facility

CLIENT: Al Futtaim Group Real Estate and Dubai Festival city

DURATION: 60 Days (Jan 2023-Feb 2023)

Value Of the Project: AED 2,500,000.00

DESCRIPTION: The Marsa Chaps Sports Facility, completed within two months, transformed an empty plot of land into a vibrant sports facility

Project Features:

2 Football Courts: Designed to meet the needs of passionate football enthusiasts.

2 Basketball Courts: Ideal for basketball lovers to showcase their skills.

5 Pedal Courts: A haven for pedal enthusiasts with a range of court options.

Children's Play Area: A safe and fun space for kids to enjoy.

Walking Track: A track for health-conscious individuals to take a stroll or jog.

Scope of Work:

Stage 1: Land Preparation Levelled the plot and compacted the soil for a solid foundation. Filled the area with road base to create a stable base for construction.

Stage 2: Retaining Wall and Slope Concrete Constructed retaining walls to define and enhance the facility's landscape. Created slope concrete to ensure safe and accessible areas.

Stage 3: Sports Facilities and Infrastructure Built jogging tracks to facilitate fitness activities. Executed civil work for all the sports courts, including kerbstones. Laid a robust 20cm thick RCC slab for the courts' foundation. Implemented electrical work for lighting to ensure the facility is accessible during evenings. Set up plumbing for drainage to manage water effectively. Installed RCC foundations for light posts and shade posts to enhance functionality and comfort.

The Marsa Chaps Sports Facility project, completed in record time, now stands as a shining example of community engagement and transformation. This newly established hub offers a wide range of sporting and recreational activities IN DUBAI festival city.

SITE PHOTOS
















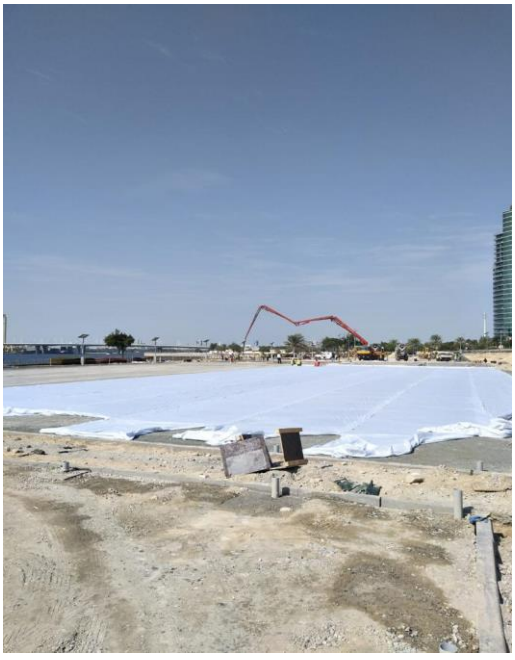










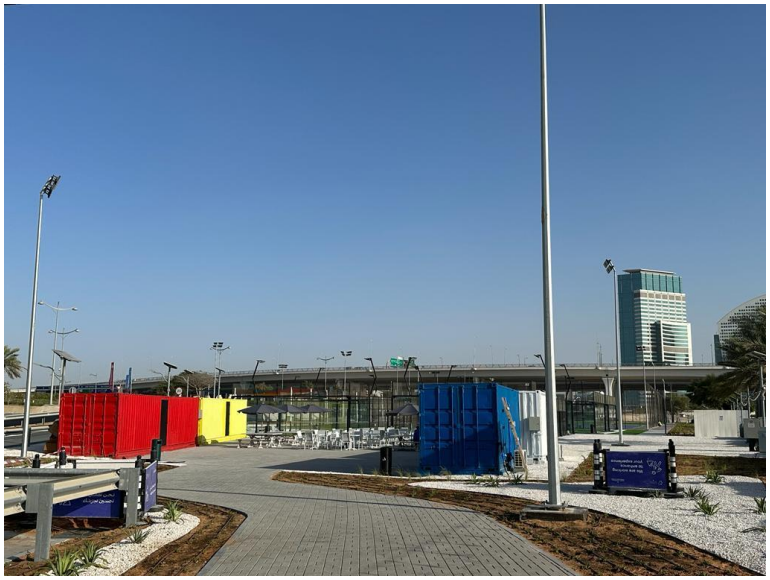



PROJECT NAME: Bathroom Waterproofing Restoration at Alqouz-Dubai.

CLIENT: Juma Al Majid Group.

DURATION: Sep 2022 to Sep 2023

Value Of the Project: AED 2,100.000.00

DESCRIPTION: Al Quoz and Muhaisna building is G+2 30-year-old building rectified leakage issue and repaired rcc slab damage caused by leakage

Project Features:

Preventing Water Leakage: It ensures that water from showers, sinks, and other sources does not seep through the walls and floors, preventing leaks that can lead to structural damage over time.

Prolonging Lifespan of Fixtures: protect the substructures and the fixtures in bathrooms and kitchens, such as cabinets and vanity tops, from water damage, which can lead to rot and deterioration.

Shower Areas: In bathrooms, shower areas are especially prone to moisture infiltration. Prevent water damage to adjacent structures.

Scope of Work:

- Carry out floor surface preparation for 65-Bathrooms & 65-kitchen in First and second floor of all building.

- Replacement of waterproof, floor tiles, plumbing fixtures etc. .
- Structural repair for the Soffit Slab.

SITE PHOTOS:
















Putzmeister
M 36
PM
Putzmeister
Elefant
TREMIX
04-2673333







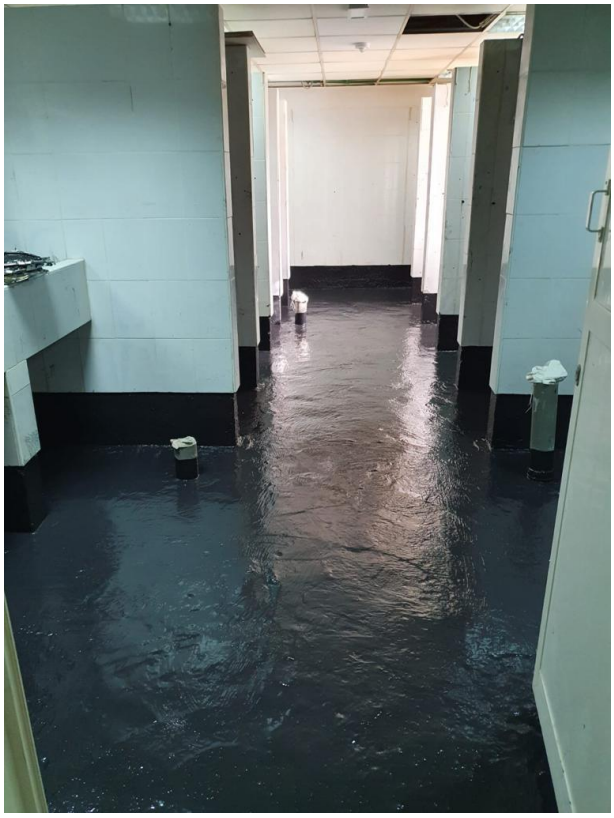

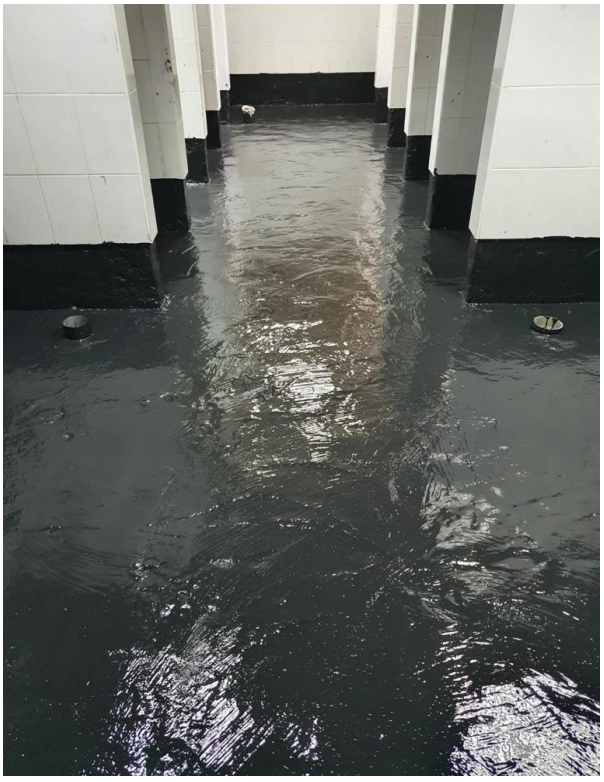



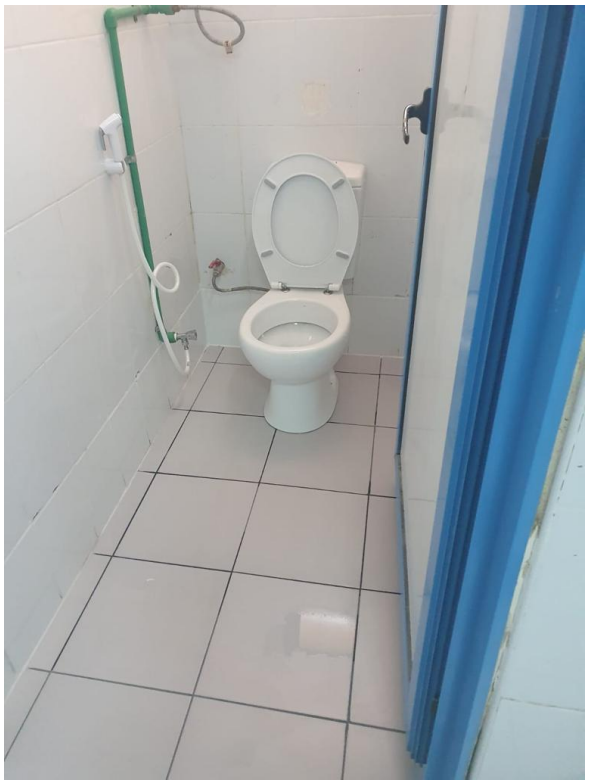

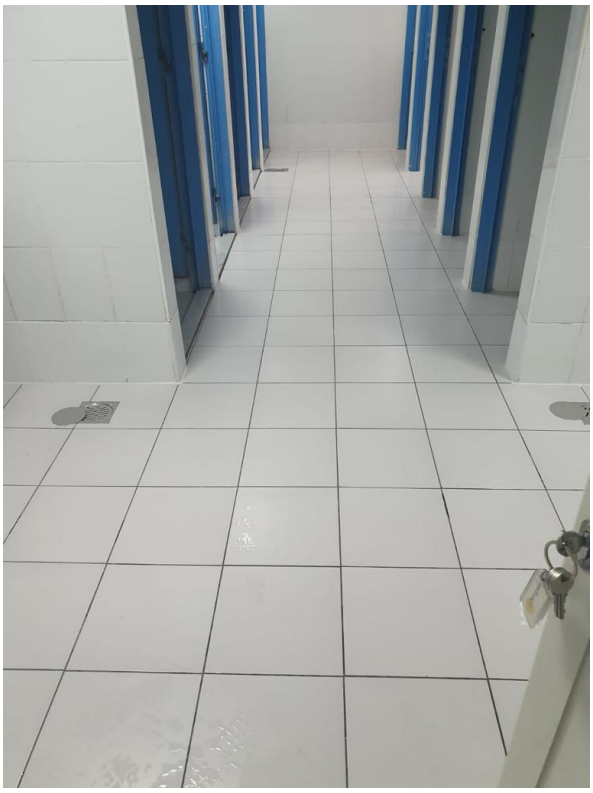





PROJECT NAME: Reinstatement and fit-out Work For 11 number of DIB Offices at Al Shoala Building.

CLIENT: AL NABOODA REAL ESATATE LLC

DURATION: 40 Days [Feb-2023 to Apr-2023]

Value Of the Project: AED 462,052.00

DESCRIPTION: converted 8th floor of the building into 11 separate office units

Project Features:


Adaptation to New Uses: Modified the Office Units to accommodate new uses or tenants, increased the flexibility of the space.

Improved Aesthetics: it Enhanced the visual appeal of a building, making it more attractive to potential tenants or buyers.

Scope of Work:

- Demolition work
- Gypsum and Carpentry work
- Restoration of Bathroom and Kitchen
- Flooring Work
- Electrical Work
- Fire Fighting Work
- Ac Work


SITE PHOTOS

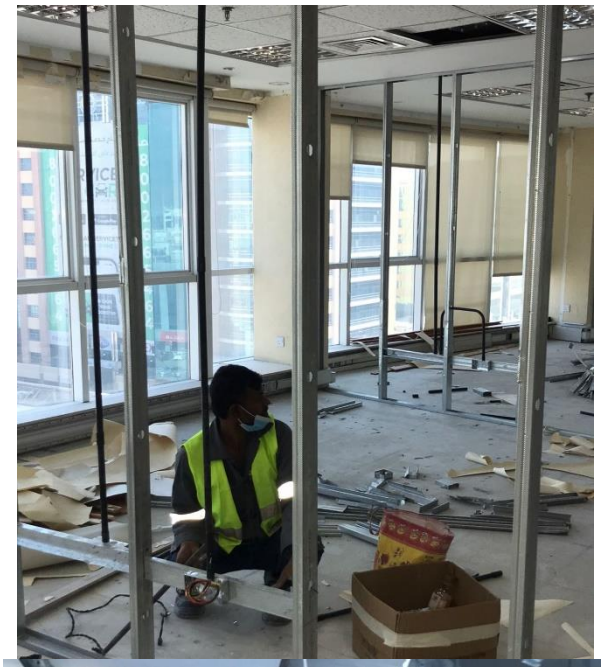







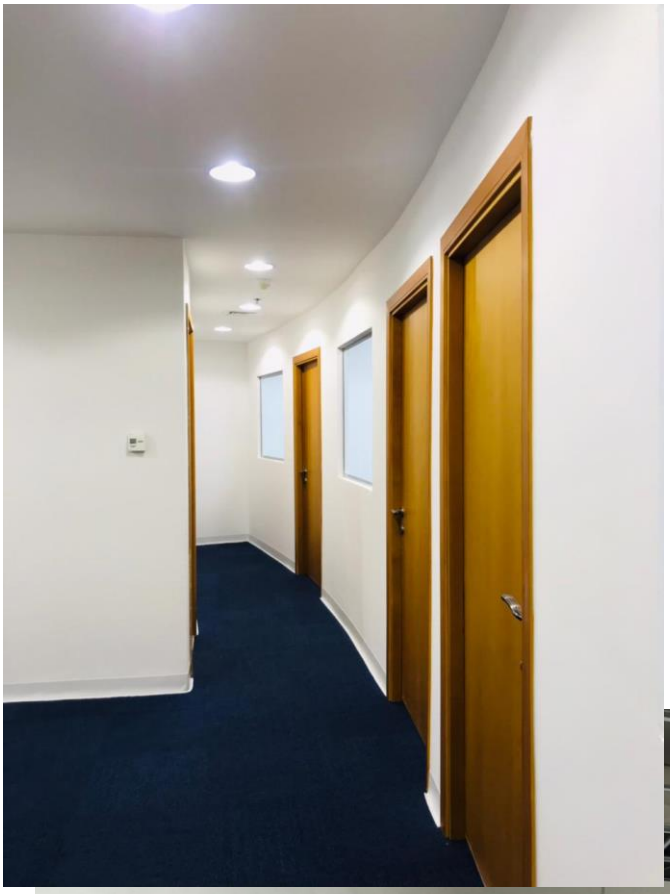













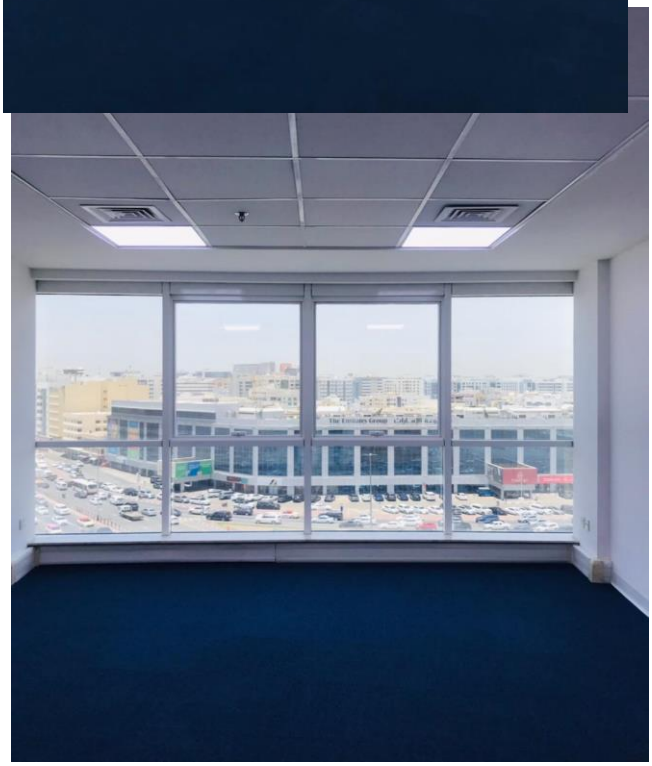





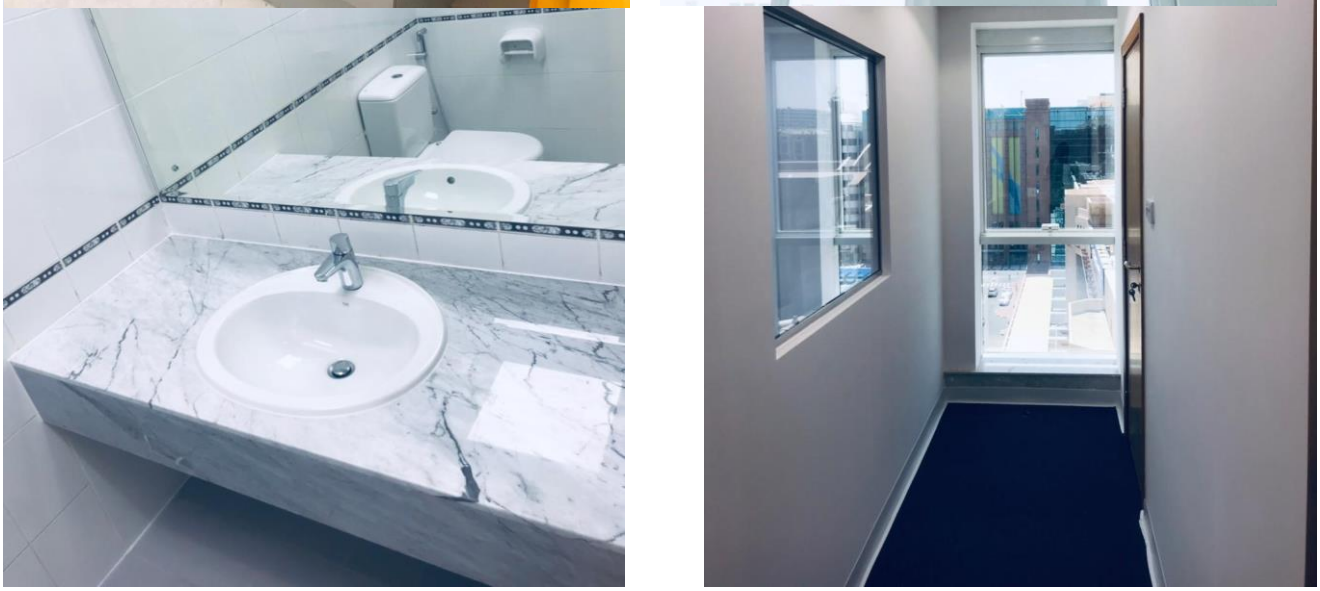

PROJECT NAME: External Repair and Painting Work at JAM Buildings.

CLIENT: Juma Al Majid Group

DURATION:70 Days [Jul-2023 to Sep-2023]

Value Of the Project: AED 712,293.00

DESCRIPTION: External Repair and painting of the G+3 & G+5 of the 5 number of building in bur Dubai zone

Project Features:





Protection from the Elements: External Painting acts as a protective barrier against weather elements such as rain, snow, UV rays, and wind. It helps prevent moisture from seeping into the structure, which can lead to rot, Mold, and other forms of damage.

Increased Longevity: External repair and painting can extend the lifespan of a building's exterior materials. It prevents degradation and structural damage.

Scope of Work:

- **DM approvals**
- **Structural repair all visible areas in both building and boundary wall:**
  Removal of spalling concrete cover Removal of loose paint Cleaning the surface by removing steel rust, dust etc. Supply and application of zinc rich primer. Replacement of steel if the steel section is corroded more than 20%. Supply and application of bonding agent. Supply and application of high compression strength repairing mortar.

- **External painting:**
  supply and application of 1 coat acrylic primer supply and application of matching texture paint in repaired area supply and application of 2 coats of Jotun Jotasheild paint.

- **Expansion Joint:**
  Fill the joints by relevant expansion materials from FOSROC-Nito seal PU40/Equivalent as Per manufacture recommendation.

SITE PHOTOS:


- ALHAMRIYA BUILDING










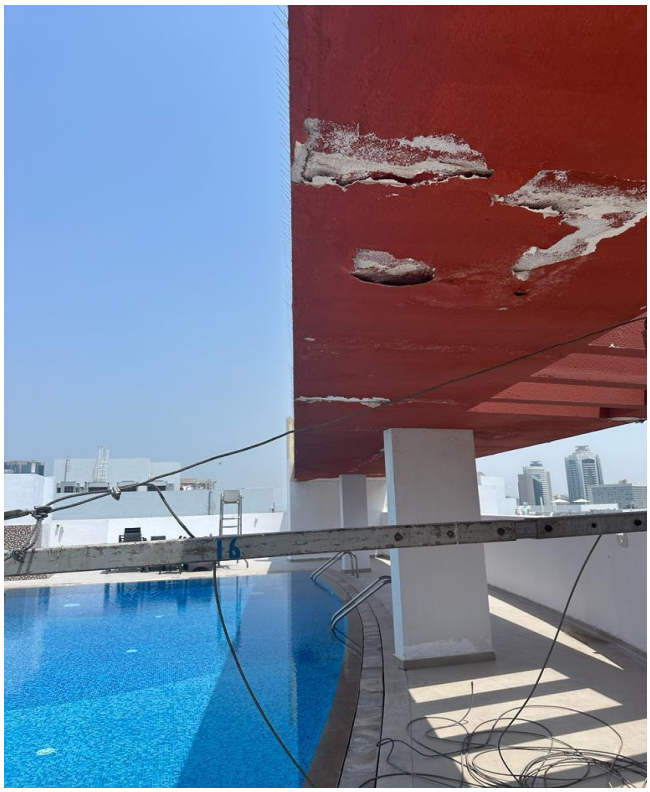

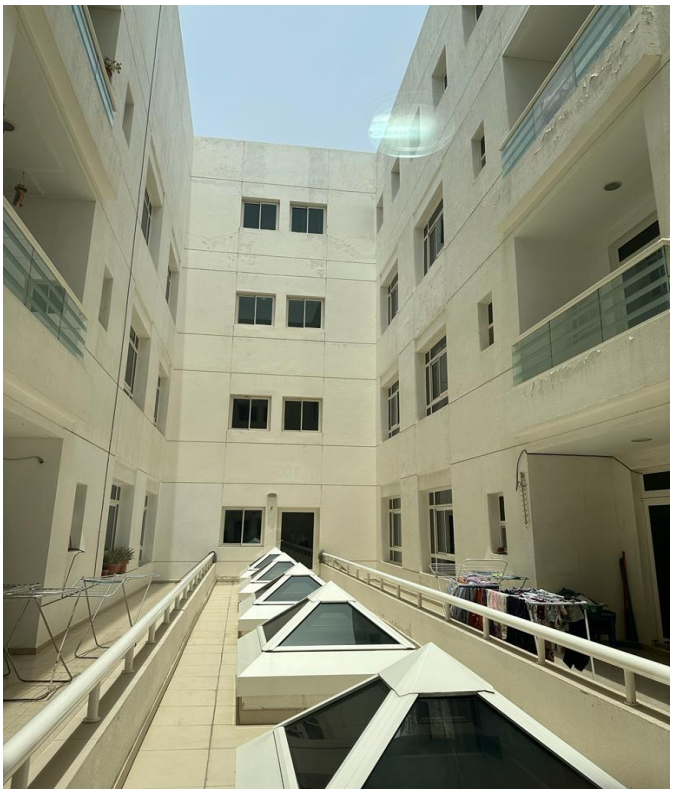









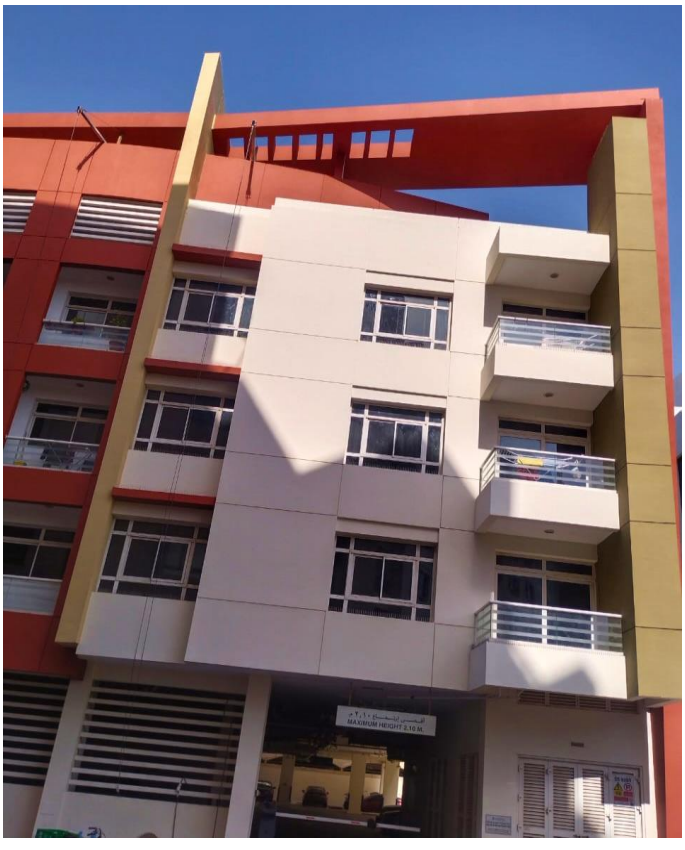



MAXIMUM HEIGHT 3.10 M.



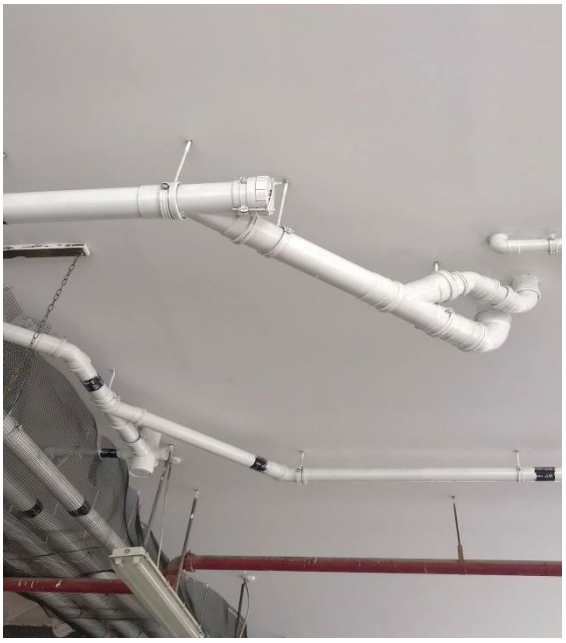



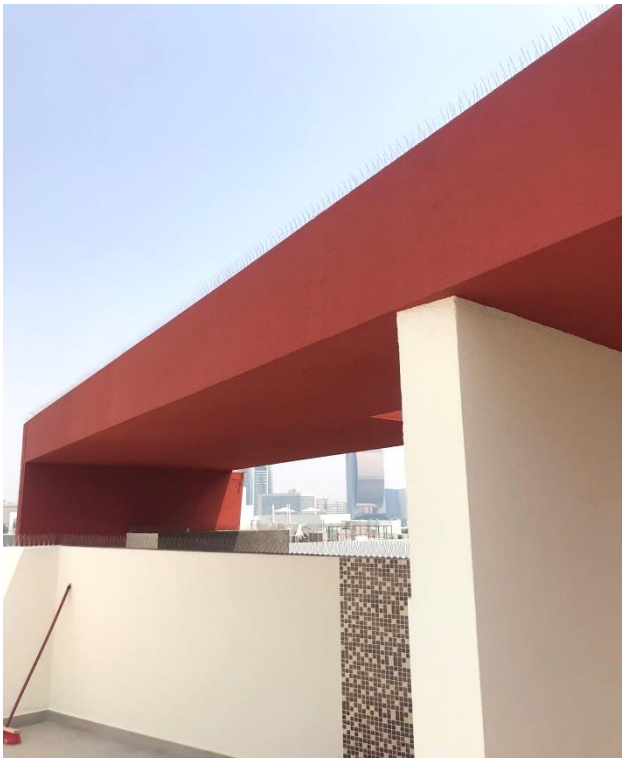

- ALKARAMA BUILDING










مدخل
Entrance




we desi
BOTTOM LINE
BOTTOM LINE
ACQUIRE






شركة المعرفة للتعهدات الصحية و الكهربائية
AL MARAFAH
PLUMBING & ELECTRICAL CONT. CO.
BUKHARI HAIRDRESSER
CAR VIBES
OUR SERVICES
Brindavan
SWADES





PROJECT NAME: Flat Maintenance of 160 Nos One & Two Bedrooms in City Tower Ajman.

CLIENT: Aqaar Properties

DURATION: May 2023 to Sep 2023

Value Of the Project: 1,200,000.00



DESCRIPTION: Refurbishment of newly sold 160 no 2bed room apartment as per the owner requirement

Project Features:

Improved Living Conditions: Ensures a safe and comfortable living environment, making it more pleasant for residents.

Safety and Security: It include repairs of locks, doors, windows, electrical fittings, enhancing the safety and security of the apartment.

Aesthetic Upgrades: Painting, flooring repairs, and other cosmetic improvements enhanced the overall appearance of the apartment.


Comfort: Fixing plumbing issues, electrical problems, and HVAC systems ensured a comfortable and functional living space.

Scope of Work:

- Civil including carpentry, painting, gypsum, and ceiling work.
- MEP including lights, electrical fittings, and all plumbing accessories such as mixer, bathtub etc.
- HVAC services and rectification.

SITE PHOTOS:



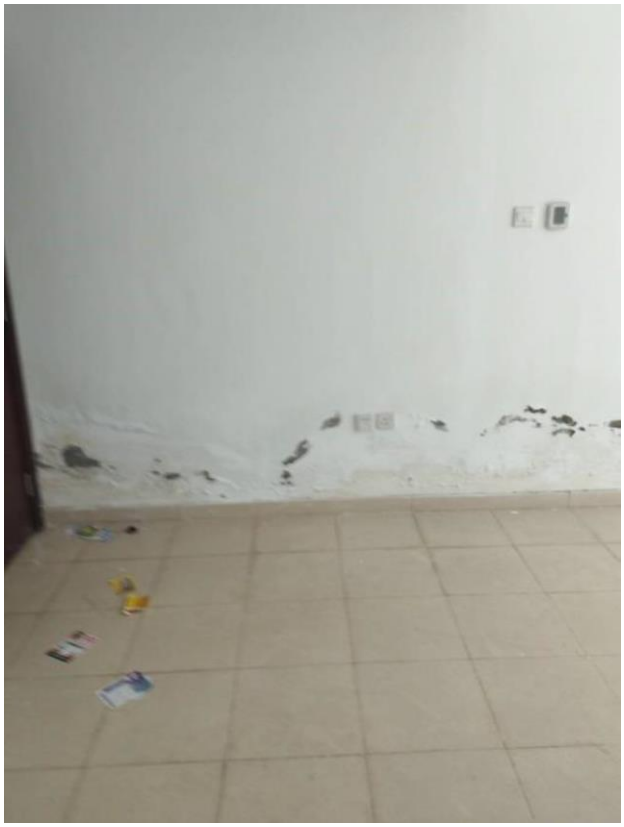










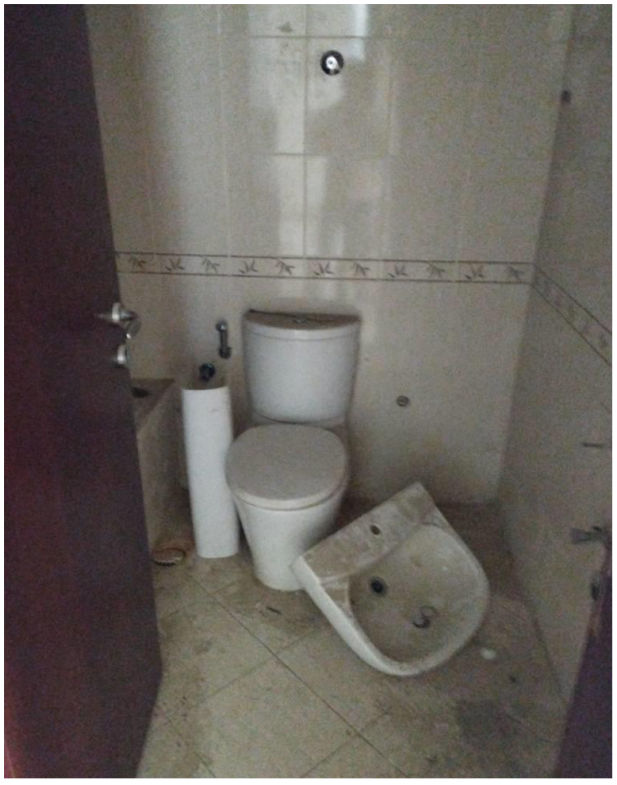















PROJECT NAME: Replacement Of Roof Waterproofing and storm waterline for Tower A5,A8 & B2 and Concrete Repair work for A5,A8,B2 & B1

CLIENT: Aqaar Properties

DURATION: Jan 2023 to Feb 2023

Value Of the Project: 750,000.00

DESCRIPTION: Replacement of roof waterproof and rainwater line and structural repair of parapet wall for G+25 residential building in Ajman

Project Features:

Structural Integrity: It helps maintain the strength and stability of the building. Cracks, spalls, and other





defects can compromise the structural integrity.

Aesthetic Improvement: This improved the appearance of a building. Fixing cracks, chips, and other blemishes can make the structure look more attractive and well-maintained.

Extend Roof Lifespan: Waterproofing membranes and coatings helped the building roof to extend the life of the roof by protecting it from the damaging effects of moisture, UV radiation, and weathering.

Rainwater Drainage: Stormwater lines collect rainwater that falls on the roof, driveways, parking lots, and other surfaces around a building. They ensure that the rainwater is properly directed away from the building to prevent flooding and water damage.

Scope of Work:

- Roof Water proofing work(A5,A8 & B2)
- Storm Water Works (A5,A8 & B2)
- Parapet wall & related civil work rectification in external area (A5,A8, B1& B2)

SITE PHOTOS:







